



## Specifications

### Power Supply

<b>Power supply voltage range</b>	9 to 32 Vdc
<b>Average operating current when GSM active</b>	350 mA

### GSM/GPRS Radio

<b>Radio type</b>	Quad-band EGSM
<b>Radio frequency</b>	850/900/1800/1900 MHz
<b>Output power Class 4 @ 850 / 900 MHz</b>	12 W
<b>Output power Class 1 @ 1800 / 1900 MHz</b>	1 W


### GSM/GPRS Radio

<b>Radio type</b>	Quad-band EGSM
<b>Radio frequency</b>	850/900/1800/1900 MHz
<b>Output power Class 4 @ 850 / 900 MHz</b>	12 W
<b>Output power Class 1 @ 1800 / 1900 MHz</b>	1 W


### Environmental

<b>Operating temperature range</b>	-20 to 55 °C
<b>Storage temperature range</b>	-20 to 50 °C
<b>Maximum humidity</b>	95% non-condensing

## Mechanical

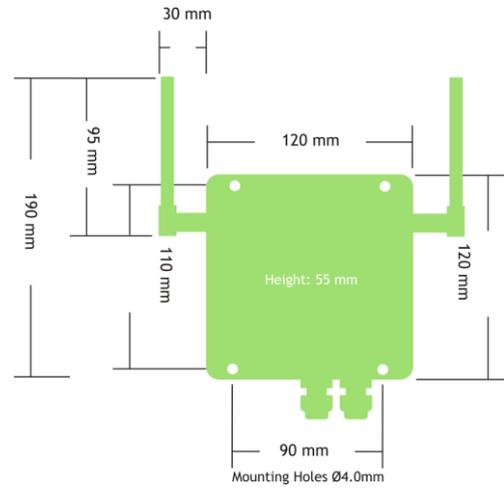

## Electrical

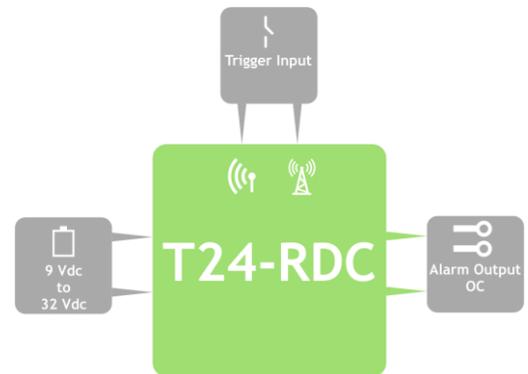

## Order Codes

### T24-RDC-1

Wireless remote data collection – 1 transmitter

### T24-RDC-2

Wireless remote data collection – 2 transmitters

### T24-RDC-5

Wireless remote data collection – 5 transmitters

### T24-RDC-10

Wireless remote data collection – 10 transmitters

### T24-RDC-200

Wireless remote data collection – 200 transmitters

**Mantracourt Electronics Ltd**  
The Drive, Farringdon  
Exeter, Devon, UK  
EX5 2JB

Tel: +44 (0)1395 232020  
Email: [sales@mantracourt.com](mailto:sales@mantracourt.com)  
[mantracourt.com](http://mantracourt.com)

