



T24-RAe/i

mantracourt

Wireless Potentiometer Transmitter Module



Introduction


The T24-RA transmitter module connects to resistive sensors such as linear and rotary potentiometers, position and displacement sensors and forms part of the T24 modular telemetry system. The data transmitted by the T24-RA can be received by multiple T24 receivers that include displays, handheld readers, analogue outputs, relay modules and computer interfaces.

T24 transmitters have been designed for battery operation and support an ultra low-power sleep mode whilst offering class leading wireless coverage and range. Configurable transmission rates from once per day to 200 per second cope with a wide range of measurement and monitoring applications. A choice of enclosures enabling battery connection, field connectivity and environmental sealing up to IP67 ensure these modules provide a flexible solution to your wireless sensor requirements.

This transmitter is highly accurate, low noise and uses up to nine point linearisation giving quality measurements from a wide range of potentiometer type transducers.

Product Features

- Simple wireless configure and calibration
- Wireless range up to 800 m (2,600 ft)
- Low power mode for long battery life
- Miniature PCB for OEM integration
- Free Visualisation software

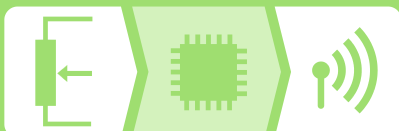

T24 System Overview



T24 Wireless Telemetry Sensor System is a modular wireless solution for industrial sensor applications.

High accuracy, high quality measurement is interfaced with simple yet powerful configuration and monitoring software.

Specifications

Measurement Specifications

Input range	500 to 100,000 Ω
Sensor excitation voltage	2.5 Vdc
Offset temperature stability (max)	0.5 ppm/ $^{\circ}$ C
Gain temperature stability (max)	50 ppm/ $^{\circ}$ C
Accuracy	0.01% of FR
Non linearity before linearization (max)	25ppm of FR
Internal resolution/Bits	16,000,000 / 24
Noise free resolution/Bits at 1 sample per second	TBC
Transmission rates	From 5ms to 1 day

Battery Life

Transmitting results at 3 per second , no excitation required	
Pair AA cells constantly on	1 month
Pair AA cells 12 sessions per day of 5 mins	2 years
Pair DD cells constantly on	4.5 months
Pair DD cells 12 sessions per day of 5 mins	>9 years

Power Supply

ACMi and OEM module	2.1 to 3.6 Vdc
ACM	5 to 18 Vdc


Radio

Radio type	Licence exempt transceiver
Radio frequency	2.4 GHz
Transmit power	10 mW
Range	Up to 800 m


Environmental

Operating temperature range	-20 to 55 $^{\circ}$ C
Storage temperature range (no batteries)	-40 to 85 $^{\circ}$ C
Maximum humidity	95% non-condensing
IP rating (ACM and ACMi)	IP67/Nema4

Mechanical

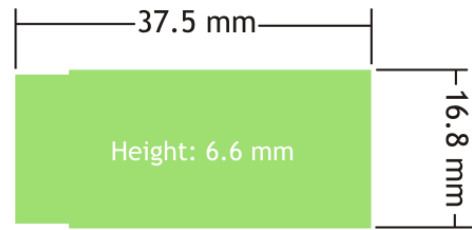

Electrical

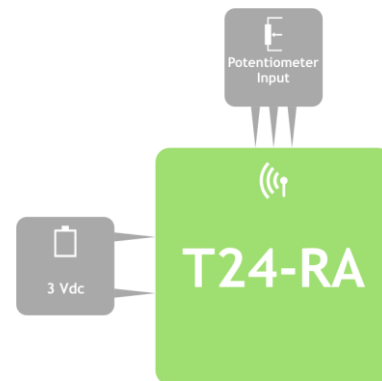

Order Codes

T24-RAe

Wireless potentiometer OEM transmitter module for external antenna

T24-RAi

Wireless potentiometer OEM transmitter module with antenna

T24-ACM-RA

Wireless potentiometer transmitter module in IP67 enclosure supporting two D batteries or external power supply.

T24-ACMi-RA

Wireless potentiometer transmitter module in IP67 enclosure for two AA batteries

T24-ACMm-RA

Wireless potentiometer transmitter module in miniature IP50 enclosure

Mantracourt Electronics Ltd
The Drive, Farringdon
Exeter, Devon, UK
EX5 2JB

Tel: +44 (0)1395 232020
Email: sales@mantracourt.com
mantracourt.com

